



6 Environmental Control System

Exhaust Fan

- Reasonable cone designing which can concentrate blowing and direction, so the air flow is bigger and the fan will be energy-efficient, lower noise.
- The frame is hot galvanized with advanced automachining technique. The thickness of the galvanized layer is 180gsm.
- One fan with 6 stainless steel blades, model 430BA. Do balance test to make sure the weight of each blade is similar.

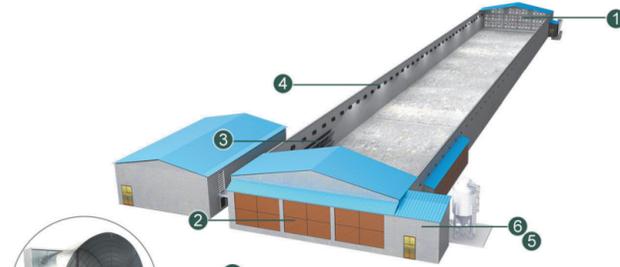


Air-Inlet Window

- Tight seal, flexible opening
- Air inlet with anti-bird net
- Strong anti-aging performance, longer service life

Control Cabinet

- It can automatically control the operation of ventilation, heating, refrigeration, alarm, air inlet window, wet curtain, spray, material line and other equipment of the whole hen house.

Controller

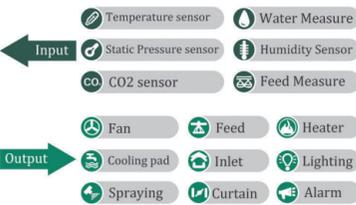

Cooling Pad

- Corrugated paper has high intensity structure
- Corrosion resistant, long service life.
- Fine percolating and absorbing water
- With rat proof wire mesh

Deflector

- Installed on the opposite side of the water curtain inside the chicken house
- Change the wind flow direction, avoiding blow the chickens directly to catch cold

H-type automatic layer chicken cage project



- Building type:** Closed prefab building
- Location:** Gensan, Philippines
- Cage mold:** 5-tier H-type automatic layer chicken equipment
- Farm Chicken No.:** 30 k per buildings



- Building type:** Closed prefab building
- Location:** Masbate, Philippines
- Cage mold:** 4-tier H-type automatic layer chicken equipment
- Farm chicken No.:** Two buildings (30k heads/ building, 60k heads/building)



- Building type:** Closed prefab building
- Location:** Palawan, Philippines
- Cage mold:** 4-tier H-type automatic layer chicken equipment
- Farm Chicken No.:** 40 k per buildings



- Building type:** Closed prefab building
- Location:** China
- Cage mold:** 4-tier H-type automatic layer chicken equipment
- Farm Chicken No.:** 40 k per building, 16 buildings


LAYER



H-type automatic chicken cage



Free Layout Design

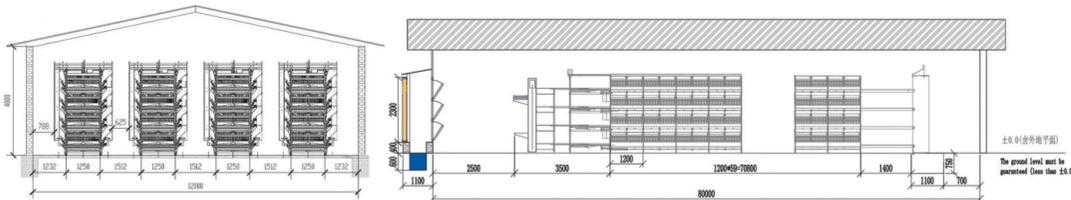

Building Size Recommendation				Different Chicken Quantity		
CHICKEN QUANTITY	TIER	BIRD/SET	ROWS	SETS/ROW	BUILDING/SIZE	
20736	4	128	3	54	74m(L)*10m(W)*4m(H)	
30336	4	128	3	79	104m(L)*10m(W)*4m(H)	
40320	4	128	4	79	104m(L)*15m(W)*4m(H)	
50560	4	128	5	79	104m(L)*15m(W)*4m(H)	
60000	5	160	5	75	100m(L)*15m(W)*5m(H)	

Our Service

- Turnkey solutions
- Door to door service
- Installation service
- Free farm & building design
- Custom clearance service
- Local aftersale service

Contact Us

JAYANTI MAKMUR INTI PERKASA

Complete Broiler, Layer, & Breeder Equipment

Kantor Jakarta:

Kompleks Ruko Griya Inti Sentosa
 Jl Griya Agung Blok O no 81
 Sunter, Jakarta Utara 14350
081289332299 / Bong Sumandi

Kantor Surabaya:

Jl Tambak Sawah
 Pergudangan Tiara Jabon F1/2
 Waru Sidoarjo 61256
081330320267 / Willy Cisaputra



>96%
Laying Rate



<0.3%
Egg Broken Rate



2:1
Feed-to-egg Ratio




20
Years Use Time



Combined with
European Technology

Overall Display

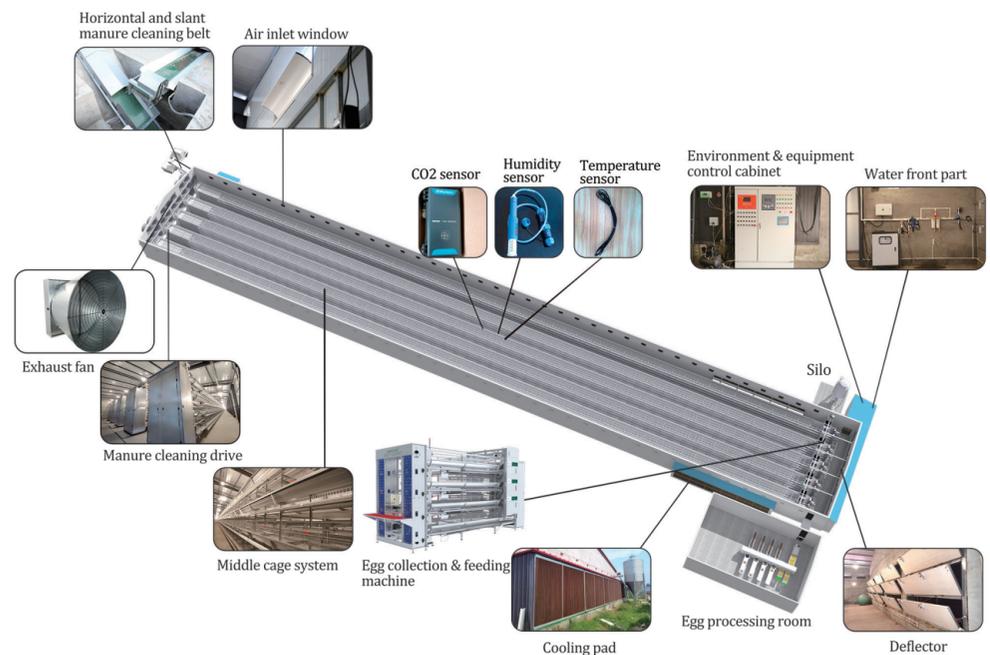

1 Cage System



- Q235 carbon wire for cage mesh, stronger tensile strength
- 275gsm Zn-Alu coating, ensure a significantly better corrosion protection and therefore a longer service life




- 2mm thickness U type cage frame, more stable to support chickens and feeding car.
- 275gsm Zn-Alu-Mg surface treatment, ensure a significantly better corrosion protection than




- 1mm metal feeder trough, step-access, climbable
- 275gsm Zn-Alu-Mg surface treatment

2 Drinking System

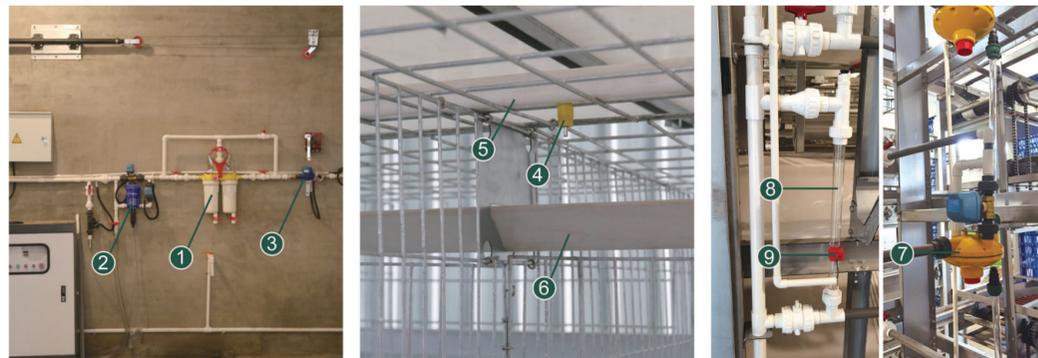

- 1 Filter helps to filter particulate impurities and ensure the hygiene of chicken drinking water
- 2 Dosing device is used to release epidemic prevention drugs, the concentration can be adjusted, to do epidemic prevention for chickens
- 3 The electronic water meter measures water and can calculate the daily water consumption
- 4 Poppet valve water drinker, built-in stainless steel column, 360 degrees water
- 5 Thickened water pipe, good light resistance, prevent algae growth
- 6 V-shaped sink to avoid water waste
- 7 Water pressure regulator can adjust the outlet pressure, with recoil function
- 8 The end can show the water level, and the valve can control the water switch
- 9 Water shortage alarm and automatic water refill

3 Egg Collection System

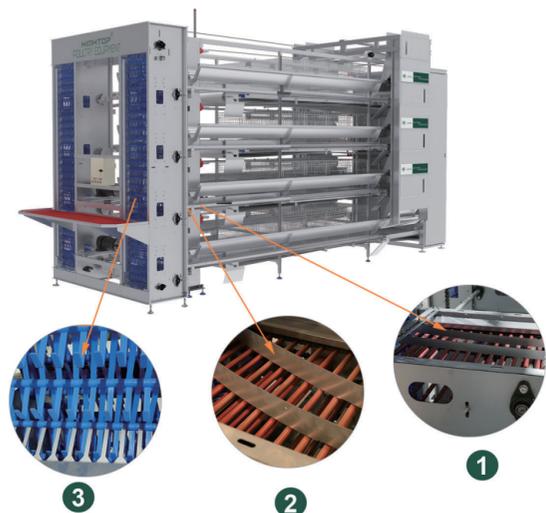

Advantage of HIGHTOP egg collection machine

- Reduce Egg Broken Rate (<0.3%)
- 1 Soft Egg filter device: Filtering soft eggs, so you get clean eggs at the end
- 2 Metal plate to change egg transportation direction: reduce broken eggs
- 3 "L" egg collection clip: smaller space than "C" type, reduce broken eggs



Central egg-gathering line




Egg processing line with egg grading, egg printing, and egg packing function.

4 Manure Removal System




- 1 1.2mm PP fecal cleaning belt, service life of 15 years.
- 2 Anti-deviation design to ensure the normal operation of the machine
- 3 Multiple fecal cleaning design to ensure that the fecal cleaning belt is kept clean
- 4 The scraper of each layer can be opened and closed jointly to clean the remaining manure plate and chicken feathers

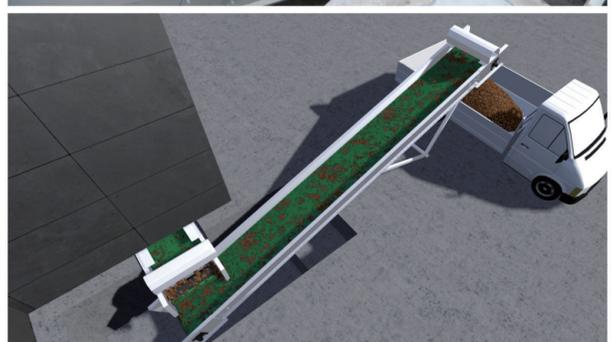

The horizontal belt takes the chicken droppings out of the chicken house and the slanting belt can take the chicken droppings to the truck directly.

5 Feeding System

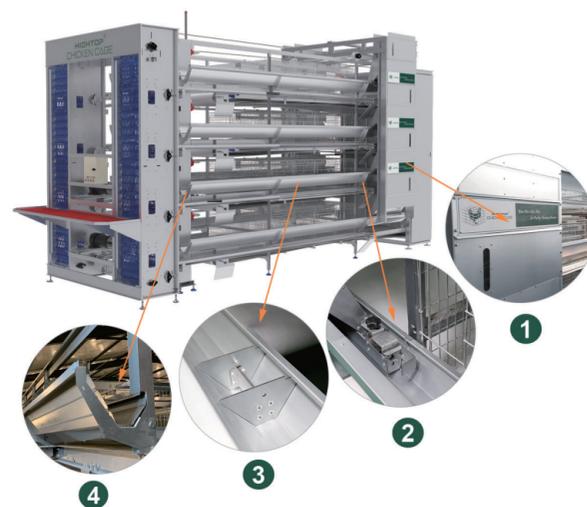


Advantage of our feeding machine

- 1 Closed feeding hopper: give chickens clean feed, reduce chicken disease
- 2 Feed uniforming device: Give chickens uniform feed, so chicken weight is even, lay more eggs
- 3 Feed returning device: Return feed back to feeder trough, save chicken feed
- 4 Deep "V" feeder trough: Minimum feed losses



Automatic feeding by feed carrier

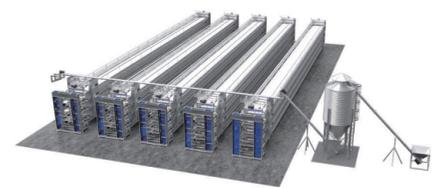

Automatic feeding by hoist



Automatic weighing device